

Arabia III

Additional information please contact:

Borr Drilling Limited
E. Pearman Building, 2nd Floor
9 Par-la-Ville Road,
Hamilton HM11, Bermuda

marketing@borrdrilling.com - www.borrdrilling.com

High Specification Jackup

General Description

Design / Generation KFELS Super A
Constructing Shipyard Keppel KFELS Singapore
Year Entered Service / Significant Upgrades..... 2013
Classification..... ABS, A1 Self-Elevating Drilling Unit
Flag..... Liberia
Overall Dimensions 246ft (L) x 232ft (W) x 31ft (D)
Legs..... 3 x 525ft
Drafts..... 22ft
Accommodation..... 150 berths ILO 92; or 120 berths ILO 133
Displacement..... 51816 Kips
Variable Deck..... 8,208 kips Operating, 9,105 kips storm operating/ 5,905 kips transit
Operating Water Depth..... 400ft
Maximum Drilling Depth..... 35,000ft

Drilling Equipment

Derrick NOV SSBN, 170ft. high, with 40ft long, 40ft base.
Hookload Capacity 2,000,000 lbs
Cantilever 75 feet / 15ft Port & 15ft Stbd
Drawworks NOV ADS-10Q, 4,600 hp w/ 2" Drill. 1045 st with 16 lines. 4 x 1150 hp motors.
Rotary Table NOV 495, 49-1/2" opening, hydraulic drive. Rated to 1000 st
Top Drive NOV TDS-1000. 907 mt load rating, 1150 hp motor. Max RPM 270, max torque 65,250 ft/lbs.
Tubular Handling NOV ST-160, 3 1/2" to 10" OD drill pipe & drill collars. Make up torque 140,000 ft/lbs, breakout torque 160,000 ft/lbs. Spinning speed 80 rpm (5" OD). Spinning torque 3467 ft/lbs.
Mud Pumps 3 x NOV 14-P-22 triple pumps, each driven by 1,229 hp motor (NOV Baylor AC) 7,500 psi capability
Solids Control 5 x NOV VSM-300 shakers

Power & Machinery

Main Power 6 x Caterpillar 3516C-HD diesel engines rated at 2,150hp at 1200rpm each with Kato generator rated to 1,500 KVA
Emergency Power 1 x Caterpillar 3508B, rated at 1298 hp @ 1800 rpm with Stamford HCM634K2 generator rated at 910 kw

Storage Capacities

Fuel Oil 4,681 bbls
Liquid Mud 5,586 bbls
Base Oil 1,476 bbls
Brine 1,728 bbls
Drill Water 19,667 bbls
Potable Water 3,543 bbls
Bulk Material..... (mud + cement) 17,600 cu ft
Sack Storage..... 5,000 sacks

BOP & Well Control Equipment

BOP Rams 2 x Cameron double ram 13-5/8" 10K psi
BOP Annulars 1 x Hydril GX13-10M 13-5/8" 10K psi Annular
BOP Handling 2 x J.D.Neuhaus EHZ 100 hoists rated to 100 mt each
Diverter Cameron 49-1/2", 1,000 psi with 16" flow lines

Mooring Equipment

Mooring Winches 4 x Cargotec electric winches rated to 46 mt. Holding brake rated to 159mt.
Wires 2,000ft x 2" galvanized wire rope
Anchors 4 x Bruce anchors rated to 7 metric ton

Cranes


Deck Cranes 3 x Seatrax cranes rated to 70mt each. (2) cranes with 120ft booms & (1) with 140ft boom.
1 x Outreach PKM700T knuckle boom crane with an 80ft boom, 7,716 lbs at 40ft radius, starboard side of the cantilever.

Special Features & Other Information

Helideck Rated for: S-92 and S-61N
Work Offline (WO) NOV SBBC 20,000 lb , (SWL)



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

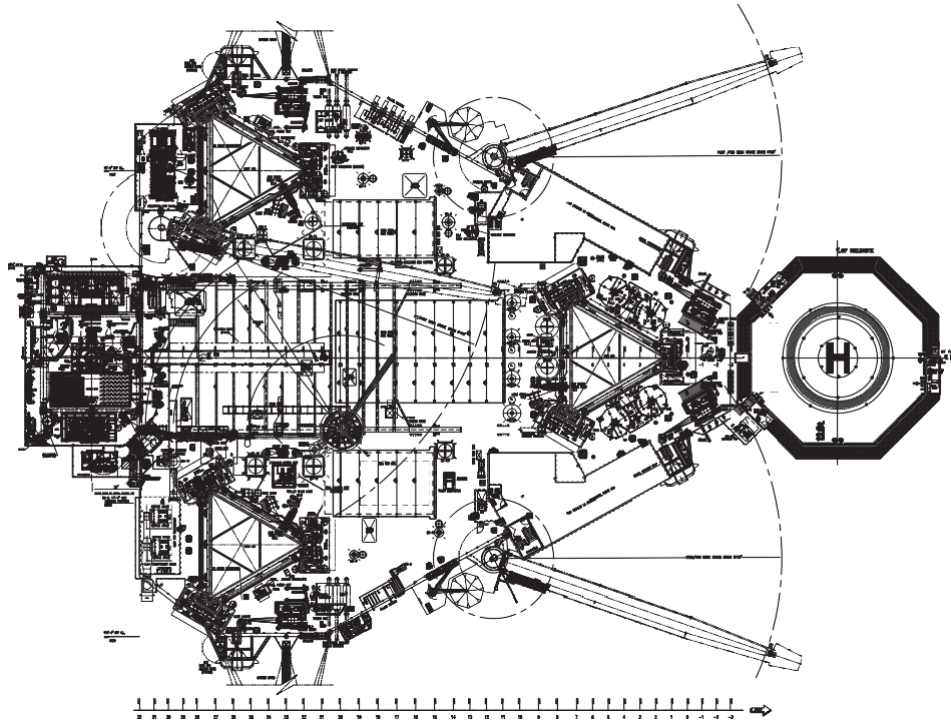

MAIN DECK ARRANGEMENT

