Skald

Additional information please

Borr Drilling Limited

E. Pearman Building, 2nd Floor 9 Par-la-Ville Road, Hamilton HM11, Bermuda

marketing@borrdrilling.com - www.borrdrilling.com

Storage Capacities

High Specification Jackup

General Description

Design / Generation	Keppel FELS Super B Class Bigfoot
Constructing Shipyard	Keppel Fels Singapore
Delivery	
Classification	ABS, A1 Self-elevating Drilling Unit
Flag	Liberia
Overall Dimensions	246ft long x 226ft wide x 27ft deep
Legs	3 x 517 ft long, triangular truss
Drafts	19 ft load line draft
Accommodation	150 persons
Load Line Displacement	40,523.57 kips
Variable Deck	9,700 kips operating / 5,500 kips field transit
Operating Water Depth	
Maximum Drilling Depth	

Drilling Equipment


Derrick	NOV SSBN, 170 ft high, with 40 ft x 40 ft base
Hookload Capacity	2,000,000lbs static hook load capacity
Cantilever	75 ft reach aft of transom, 15 ft port & 15 ft
Drawworks	NOV SSGD 1000, (4) 1,500 AC motors 1,500 hp each, 2"
	drilling line
Rotary Table	NOV RST-495. 49-1/2" hydraulic rated at 1000st.
Top Drive	NOV TDX-1000 modular, 1,000st hoisting capacity, with dual AC motors, rated to 91,000 ft-lbs continuous drilling torque.
Tubular Handling	HRIII Hydraracker, tubular range 3-1/2" to 14" catwalk machine, 14,000 lbs SWL capable of handling up to 30" casing.
Mud Pumps	3 x NOV 14-P-220 triplex pump rated 2,200 hp, each driven by 2x Baylor AC traction motors. Rated to 7,500 psi
Solids Control	4 x VSM 300 shale shakers.
	Power & Machinery
Main Power	5 x Caterpillar C175 engines rated at 2,588 hp at 1200 rpm with (5) KATO Generator rated at 1,833 KW
Emergency Power	1 x Caterpillar 3516B diesel engine rated 2,549 hp at 1,800 rpm, with KATO Generator at 1,825 KW
Power Distribution	NOV / ABB VFD System.

Liquid Mud Base Oil Brine Drill Water Potable Water Bulk Material	
	BOP & Well Control Equipment
BOP Rams	2 x Cameron 13-5/8" 10,000psi Double "U" type ram preventers
BOP Annular	1 x NOV Shaffer 13-5/8" 5,000 psi annular preventer
BOP Handling	4 x J.D Neuhaus BOP handling hoists, each rated 60T
Diverter	Drill-Quip Diverter 49-1/2" rated at 500 psi with 1 x 16" flow line, 2 x 16" overboard lines, 1 x 4" deluge line & 1 x 4" fill line.
	Mooring Equipment
Mooring Winches	4 x BROHL electric driven with a capacity of 2,500 ft of 1- 1/2" wire rope. 39.37T pull capacity and 61T brake holding capacity (first layer)
Anchor Lines	4 x 38mm x 2,500ft IWRC 6 x 36 galvanized wire rope
Anchors	4 x Delta Flipper anchors rated at 5 MT
	Cranes
Deck Cranes	4 x Seatrax S7224 cranes rated at 76st with 130ft booms.
	Special Features & Other Information
Helideck	Rated for Sikorsky S-61N, S-92 and MI -17 helicopters. CAP 437 9 th Edition.
Work Offline (WO)	Ability to make-up and break-out drill pipe and casing offline. Casing racking capacity in derrick: 3,780ft of 13-3/8", 4,860ft of 9-5/8" or 5,940ft of 7".
Cellar Deck Crane	2 x FORUM Multi-purpose cranes rated 15,000 lbs located underneath cantilever Port & Stbd side.
CTU/STU	Tensa RS300-60 vertical hydraulic tensioner unit, platform rated 600 kips, maximum 30" casing. Tensa PT200 secondary tensioner unit, rated 440 kips
Jacking System	6 pinions per chord, 3 x chords per leg,1000 kips per pinion.1300 kips per pinion for full preload jacking. RPD monitoring
Field Transit	Capable of rig move with 660 kips of setback in the derrick.



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

Skald

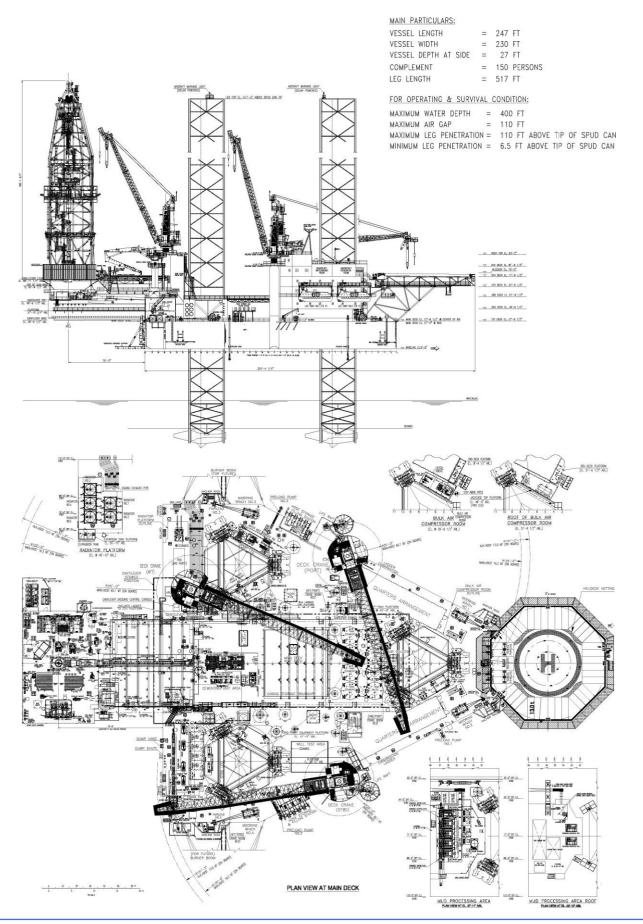



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.